

Hybrid Stepping Motor

Type: 4.6 Nm 5.5 A

CNC PROFI KJ

Tel.: +49 30 4942661

E-mail: info@cncprofi.eu

specifications:

MODEL	PHASE	STEP ANGLE ± 5 % DEG/STEP	RATED VOLTAGE V	CURRENT /PHASE A	RESISTANCE /PHASE ± 10 % ohms	INDUCTANCE /PHASE ± 20 % mH	HOLDING TORQUE N.m	DETENT TORQUE N.cm	ROTOR INERTIA g.cm ²	WEIGHT kg
	2	1.8	1.9	5.5	0.35	3.0	4.6	6.5	810	2.55

Temperature Rise-----80°C Max.


Ambient Temperature Range----20°C~+50°C

Insulation Resistance-----100Mohms Min.50V DC

Dielectric Strength-----500V DC 1minute

Insulating class-----B

COLORS OF LEAD WIRES BIPOLAR

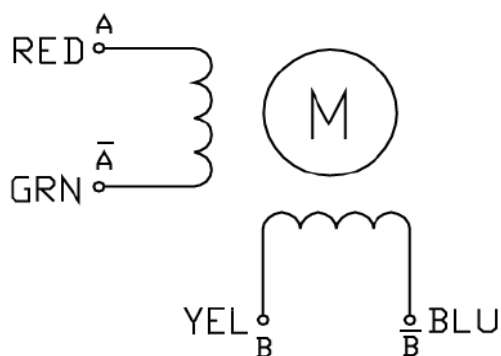


WIRING DIAGRAM

CW DIRECTION	STEP	A	\bar{A}	B	\bar{B}
↓	1	+		+	
	2		+	+	
	3		+		+
	4	+			+
	1	+		+	

CW see from the flange side

Dimension:

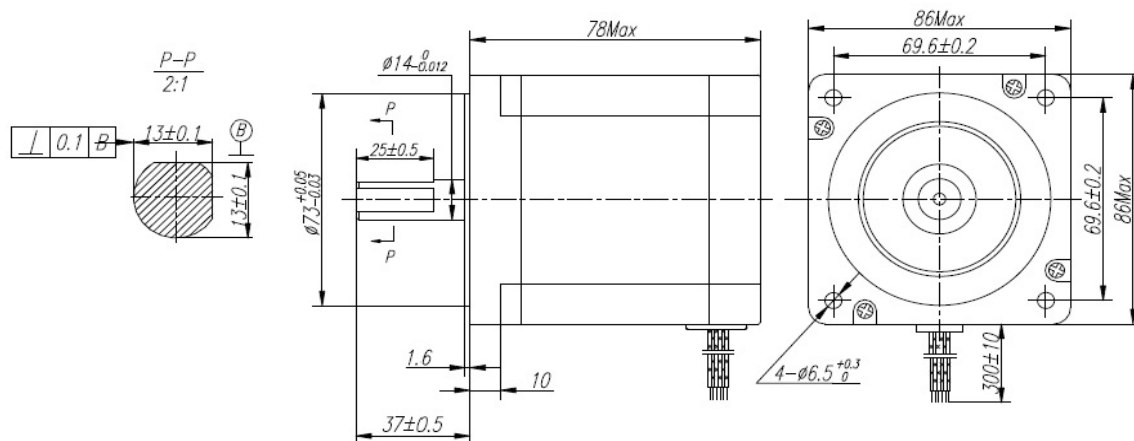

CNC Profi Ltd.

Biesdorfer Weg 21
D-12683 Berlin Germany

Geschäftsführer: Jacek Maciejewski
HRB 114651 Amtsger. Berlin

Tel.: +49.30.4942661
Fax: +49.30.51656089

E-mail: info@profikj.de
www.cncprofi.eu