


Micro DC Motors


Motor	nom. voltage (***)	reduc- tion. ratio $i=...:1$	nom. speed		max. torque (Ncm)	nom. current	
			no load (RPM)	at max torque (RPM)		no load (mA)	at max torque (mA)
RH158-24-15	24V ▲	14,74	440	300	10	< 70	330
RH158-24-30	24V ▲	29,75	210	140	20	< 70	330
RH158-24-75	24V ▲	76,84	81	55	50	< 70	330
RH158-24-100	24V ▲	94,37	66	45	60	< 70	330
RH158-24-200	24V ▲	198,5	33	23	100	< 70	330
RH158-24-250	24V ▲	243,8	26	21	100	< 70	330
RH158-24-510	24V ▲	513	12	10,5	100	< 70	330
RH158-24-630	24V ▲	630	10	9	100	< 70	330

*** 12V version is possible

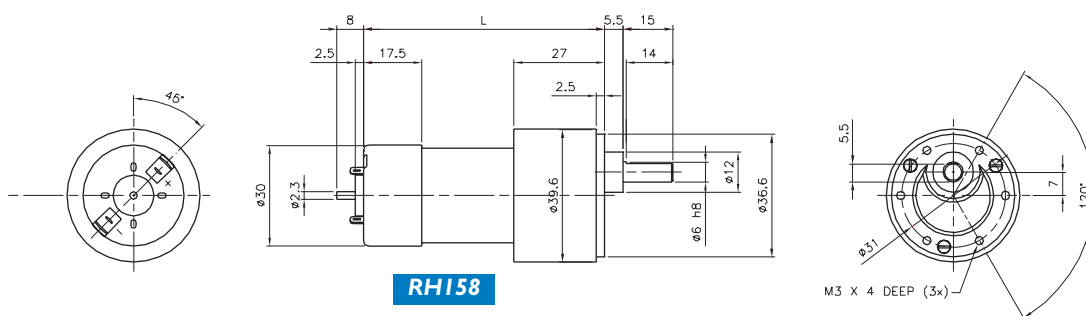

Motor	nom. voltage (***)	reduc- tion. ratio $i=...:1$	nom. speed		max. torque (***) (Ncm)	nom. current	
			no load (RPM)	at max torque (RPM)		no load (mA)	at max torque (mA)
LI49-12-10	12V ▲	10	255	165	1,5	< 20	50
LI49-12-21	12V ▲	20,8	125	80	2,5	< 20	50
LI49-12-43	12V ▲	43,3	60	40	3,8	< 20	50
LI49-12-90	12V ▲	90,3	30	18	8	< 20	50
LI49-12-188	12V ▲	188	14	9	14	< 20	50
LI49-12-392	12V ▲	392	7	5	20	< 20	50

*** 6V version is possible

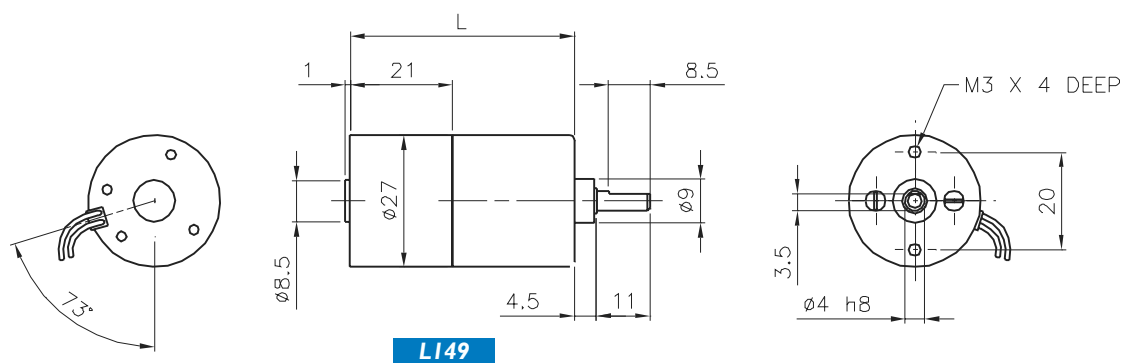

▲ = standard delivery time on request (approx. 6-8 weeks)

● = stock delivery time 1 week (small quantities)