


V1 when pcb driver is ok



V1.1 when pcb driver is broken (P7-Z to P9-A, change mach pin)

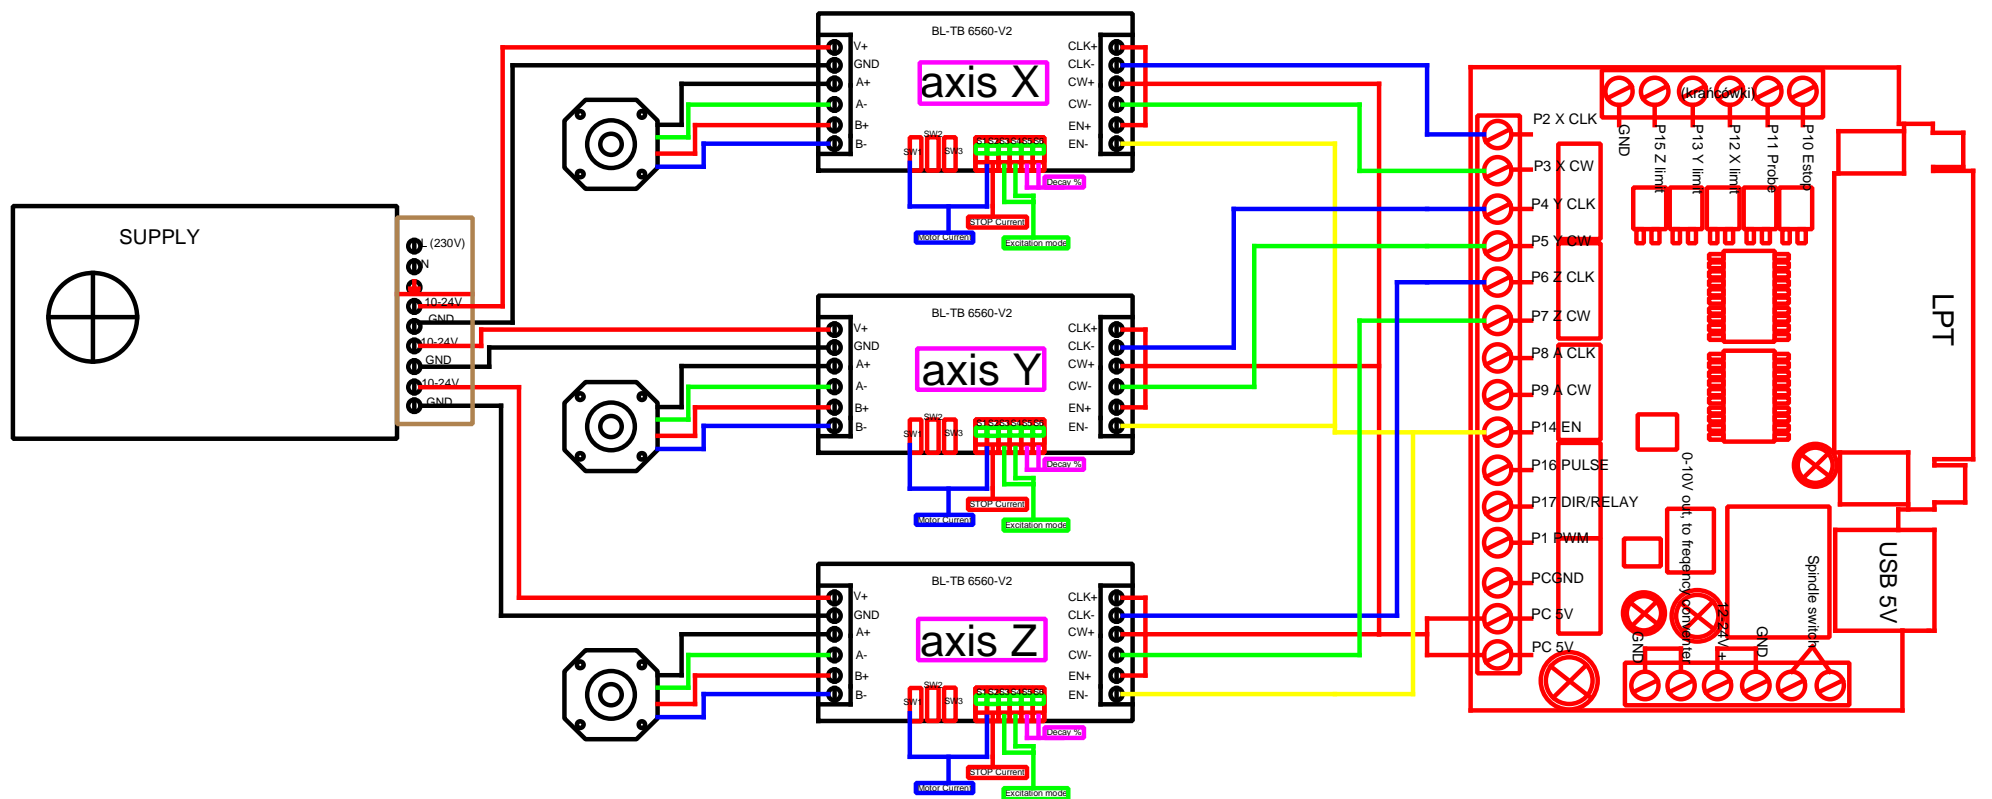